Shower Flow Controller

Pressure Compensating

1/2”-NPT Female x 1/2”-NPT Male

flow, stop and go®

Features and Benefits

- Solid brass construction.
- Standard ½” shower threads.
- Built-in E-US Type flow regulator for constant flow from 20 to 80 psi.



Certifications

Materials

Name	Material
Body	Chrome plated brass
Core	Acetal
O-ring	EPDM
Washer	EPDM

Options Available


Part #	Description
13100	1.5 gpm - Green flow regulator
13101	1.75 gpm - Light Blue flow regulator
13102	2.0 gpm - Lilac flow regulator
13103	2.5 gpm - Gray flow regulator

Packaging:


PCA® shower flow controller — *1 pc (bag), 6 pcs (tube), 50 pcs (tray)*

Technical Data

Medium: Clear water only

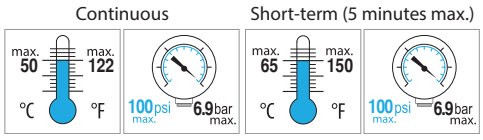

Dimensions

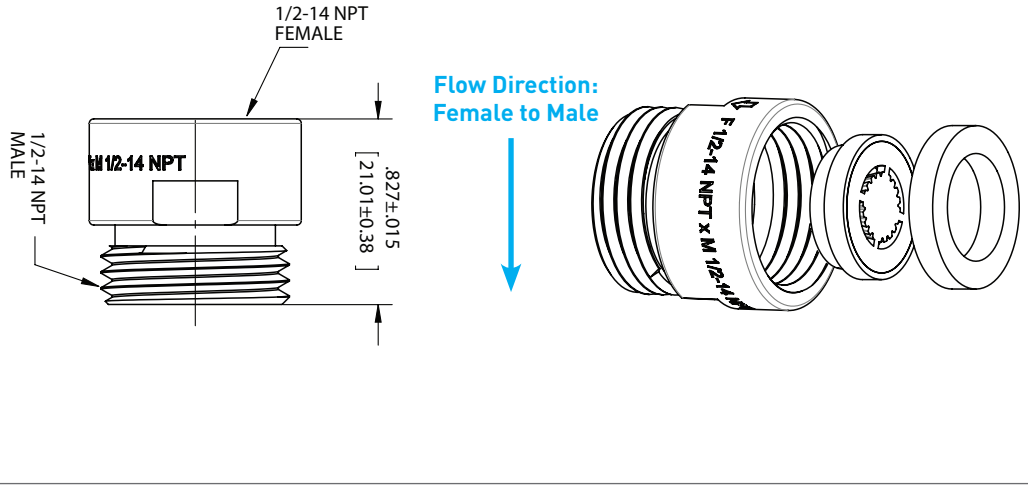

NEOPERL®, Inc., Waterbury, CT • Tel: 203-756-8437 • Fax: 203-574-2107 • www.neoperl.us

May 2025 - Information subject to change without notice.